

RADIATION HARDENED LOGIC LEVEL POWER MOSFET THRU-HOLE (Low-Ohmic TO-254AA)

60V, P-CHANNEL
R₇ TECHNOLOGY

Product Summary

Part Number	Radiation Level	R _{D(on)}	I _D
IRHLMS797064	100 kRads(Si)	0.018Ω	-45A*
IRHLMS793064	300 kRads(Si)	0.018Ω	-45A*



Description

IR HiRel R7 Logic Level Power MOSFETs provide simple solution to interfacing CMOS and TTL control circuits to power devices in space and other radiation environments. The threshold voltage remains within acceptable operating limits over the full operating temperature and post radiation. This is achieved while maintaining single event gate rupture and single event burnout immunity.

The device is ideal when used to interface directly with most logic gates, linear IC's, micro-controllers, and other device types that operate from a 3.3-5V source. It may also be used to increase the output current of a PWM, voltage comparator or an operational amplifier where the logic level drive signal is available.

Features

- Low R_{D(on)}
- Fast Switching
- Single Event Effect (SEE) Hardened
- Low Total Gate Charge
- Simple Drive Requirements
- Hermetically Sealed
- Ceramic Eyelets
- Electrically Isolated
- Light Weight
- ESD Rating: Class 3B per MIL-STD-750, Method 1020

Absolute Maximum Ratings

Pre-Irradiation			
Symbol	Parameter	Value	Units
I _{D1} @ V _{GS} = 4.5V, T _C = 25°C	Continuous Drain Current	-45*	A
I _{D2} @ V _{GS} = 4.5V, T _C = 100°C	Continuous Drain Current	-45*	
I _{DM} @ T _C = 25°C	Pulsed Drain Current ①	-180	
P _D @ T _C = 25°C	Maximum Power Dissipation	208	W
	Linear Derating Factor	1.67	W/°C
V _{GS}	Gate-to-Source Voltage	±10	V
E _{AS}	Single Pulse Avalanche Energy ②	935	mJ
I _{AR}	Avalanche Current ①	-45	A
E _{AR}	Repetitive Avalanche Energy ①	20.8	mJ
dv/dt	Peak Diode Recovery dv/dt ③	-6.3	V/ns
T _J	Operating Junction and	-55 to +150	°C
T _{STG}	Storage Temperature Range		
	Lead Temperature	300 (0.063 in. /1.6 mm from case for 10s)	
	Weight	9.3 (Typical)	g

*Current is limited by package

For footnotes refer to the page 2.

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (Unless Otherwise Specified)

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	-60	—	—	V	$\text{V}_{\text{GS}} = 0\text{V}$, $I_D = -250\mu\text{A}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	-0.06	—	$\text{V}/^\circ\text{C}$	Reference to 25°C , $I_D = -1.0\text{mA}$
$R_{\text{DS(on)}}$	Static Drain-to-Source On-Resistance	—	—	0.018	Ω	$\text{V}_{\text{GS}} = -4.5\text{V}$, $I_{D2} = -45\text{A}^*$ ④
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	-1.0	—	-2.0	V	
$\Delta \text{V}_{\text{GS(th)}}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	5.5	—	$\text{mV}/^\circ\text{C}$	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}$, $I_D = -250\mu\text{A}$
g_{fs}	Forward Transconductance	-52	—	—	S	$\text{V}_{\text{DS}} = -10\text{V}$, $I_{D2} = -45\text{A}$ ④
I_{DSS}	Zero Gate Voltage Drain Current	—	—	-1.0	μA	$\text{V}_{\text{DS}} = -48\text{V}$, $\text{V}_{\text{GS}} = 0\text{V}$
		—	—	-25		$\text{V}_{\text{DS}} = -48\text{V}$, $\text{V}_{\text{GS}} = 0\text{V}$, $T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Leakage Forward	—	—	-100	nA	$\text{V}_{\text{GS}} = -10\text{V}$
	Gate-to-Source Leakage Reverse	—	—	100		$\text{V}_{\text{GS}} = 10\text{V}$
Q_G	Total Gate Charge	—	—	123	nC	$I_{D1} = -45\text{A}$
Q_{GS}	Gate-to-Source Charge	—	—	62		$\text{V}_{\text{DS}} = -30\text{V}$
Q_{GD}	Gate-to-Drain ('Miller') Charge	—	—	50		$\text{V}_{\text{GS}} = -4.5\text{V}$
$t_{\text{d(on)}}$	Turn-On Delay Time	—	—	54	ns	$\text{V}_{\text{DD}} = -30\text{V}$
t_r	Rise Time	—	—	400		$I_{D1} = -45\text{A}$
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	—	120		$R_G = 2.35\Omega$
t_f	Fall Time	—	—	138		$\text{V}_{\text{GS}} = -4.5\text{V}$
$L_s + L_D$	Total Inductance	—	6.8	—	nH	Measured from Drain lead (6mm/0.25 in from package) to Source lead (6mm/0.25 in from package)
C_{iss}	Input Capacitance	—	7540	—	pF	$\text{V}_{\text{GS}} = 0\text{V}$
C_{oss}	Output Capacitance	—	2760	—		$\text{V}_{\text{DS}} = -25\text{V}$
C_{rss}	Reverse Transfer Capacitance	—	350	—		$f = 1.0\text{MHz}$
R_G	Gate Resistance	—	2.4	—	Ω	$f = 1.0\text{MHz}$, open drain

Source-Drain Diode Ratings and Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	—	—	-45*	A	
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	-180		
V_{SD}	Diode Forward Voltage	—	—	-5.0	V	$T_J = 25^\circ\text{C}$, $I_S = -45\text{A}$, $\text{V}_{\text{GS}} = 0\text{V}$ ④
t_{rr}	Reverse Recovery Time	—	—	120	ns	$T_J = 25^\circ\text{C}$, $I_F = -45\text{A}$, $\text{V}_{\text{DD}} \leq -25\text{V}$
Q_{rr}	Reverse Recovery Charge	—	—	375	μC	$dI/dt = -100\text{A}/\mu\text{s}$ ④
t_{ton}	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by $L_s + L_D$)				

* Current is limited by package

Thermal Resistance

Symbol	Parameter	Min.	Typ.	Max.	Units
$R_{\theta\text{JC}}$	Junction-to-Case	—	—	0.60	$^\circ\text{C/W}$
$R_{\theta\text{CS}}$	Case-to-Sink	—	0.21	—	
$R_{\theta\text{JA}}$	Junction-to-Ambient (Typical Socket Mount)	—	—	48	

Footnotes:

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- ② $\text{V}_{\text{DD}} = -50\text{V}$, starting $T_J = 25^\circ\text{C}$, $L = 0.92\text{mH}$, Peak $I_L = -45\text{A}$, $\text{V}_{\text{GS}} = -10\text{V}$
- ③ $I_{\text{SD}} \leq -45\text{A}$, $dI/dt \leq -790\text{A}/\mu\text{s}$, $\text{V}_{\text{DD}} \leq -60\text{V}$, $T_J \leq 150^\circ\text{C}$
- ④ Pulse width $\leq 300\ \mu\text{s}$; Duty Cycle $\leq 2\%$
- ⑤ Total Dose Irradiation with V_{GS} Bias. -10 volt V_{GS} applied and $\text{V}_{\text{DS}} = 0$ during irradiation per MIL-STD-750, Method 1019, condition A.
- ⑥ Total Dose Irradiation with V_{DS} Bias. -48 volt V_{DS} applied and $\text{V}_{\text{GS}} = 0$ during irradiation per MIL-STD-750, Method 1019, condition A.

Radiation Characteristics

IR HiRel Radiation Hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at International Rectifier is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 5 and 6) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

Table1. Electrical Characteristics @ $T_j = 25^\circ\text{C}$, Post Total Dose Irradiation ⑤⑥

Symbol	Parameter	Up to 300 kRads(Si) ¹		Units	Test Conditions
		Min.	Max.		
BV_{DSS}	Drain-to-Source Breakdown Voltage	-60	—	V	$\text{V}_{\text{GS}} = 0\text{V}$, $\text{I}_D = -250\mu\text{A}$
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	-1.0	-2.0	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}$, $\text{I}_D = -250\mu\text{A}$
I_{GSS}	Gate-to-Source Leakage Forward	—	-100	nA	$\text{V}_{\text{GS}} = -10\text{V}$
I_{GSS}	Gate-to-Source Leakage Reverse	—	100	nA	$\text{V}_{\text{GS}} = 10\text{V}$
I_{DSS}	Zero Gate Voltage Drain Current	—	-10	μA	$\text{V}_{\text{DS}} = -48\text{V}$, $\text{V}_{\text{GS}} = 0\text{V}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source On-State ^④ Resistance (TO-3)	—	0.019	Ω	$\text{V}_{\text{GS}} = -4.5\text{V}$, $\text{I}_{\text{D2}} = -45\text{A}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source On-State ^④ Resistance (Low Ohmic TO-254AA)	—	0.018	Ω	$\text{V}_{\text{GS}} = -4.5\text{V}$, $\text{I}_{\text{D2}} = -45\text{A}$
V_{SD}	Diode Forward Voltage	—	-5.0	V	$\text{V}_{\text{GS}} = 0\text{V}$, $\text{I}_S = -45\text{A}$

1. Part numbers IRHLMS797064 and IRHLMS793064

IR HiRel radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects

Table 2. Typical Single Event Effect Safe Operating Area

LET (MeV/(mg/cm ²))	Energy (MeV)	Range (μm)	V_{DS} (V)					
			@ $\text{VGS}=0\text{V}$	@ $\text{VGS}=2\text{V}$	@ $\text{VGS}=3\text{V}$	@ $\text{VGS}=4\text{V}$	@ $\text{VGS}=5\text{V}$	@ $\text{VGS}=6\text{V}$
$39.0 \pm 5\%$	$312 \pm 7.5\%$	$38.6 \pm 7.5\%$	-60	-60	-60	-60	-60	-60
$61.7 \pm 5\%$	$584 \pm 7.5\%$	$48.7 \pm 7.5\%$	-60	-60	-60	-60	—	—
$91.5 \pm 5\%$	$1262 \pm 7.5\%$	$70.1 \pm 7.5\%$	-40	—	—	—	—	—

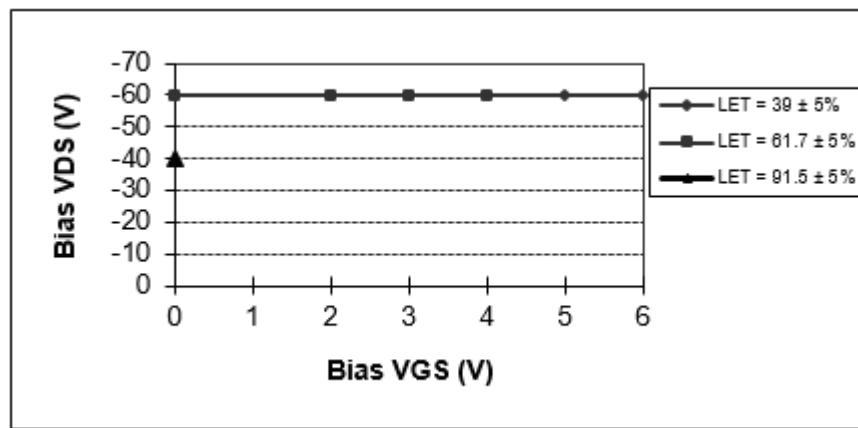


Fig a. Typical Single Event Effect, Safe Operating Area

For footnotes refer to the page 2.

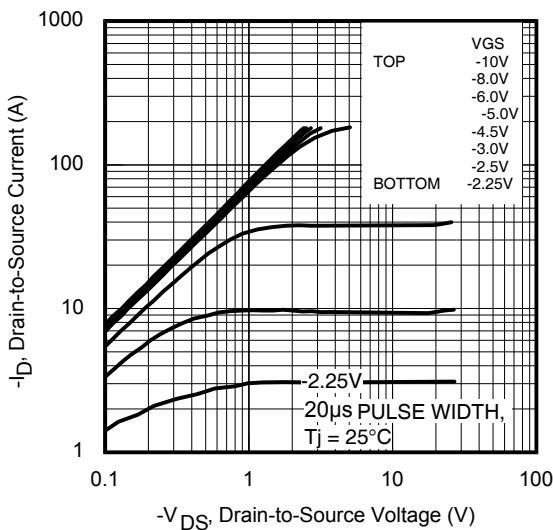


Fig 1. Typical Output Characteristics

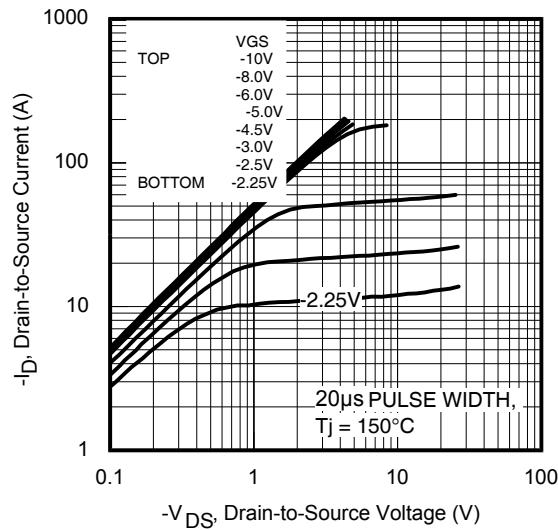


Fig 2. Typical Output Characteristics

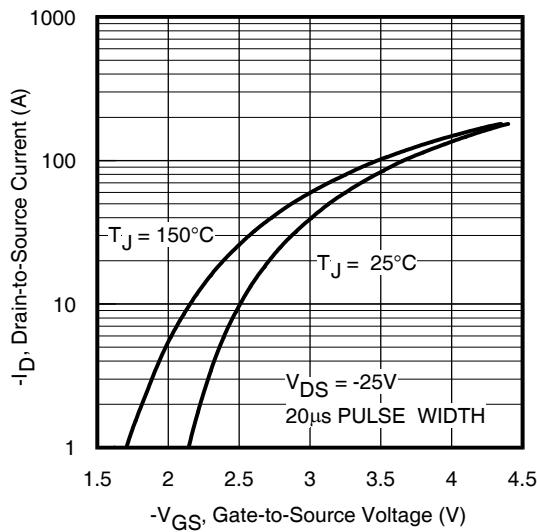


Fig 3. Typical Transfer Characteristics

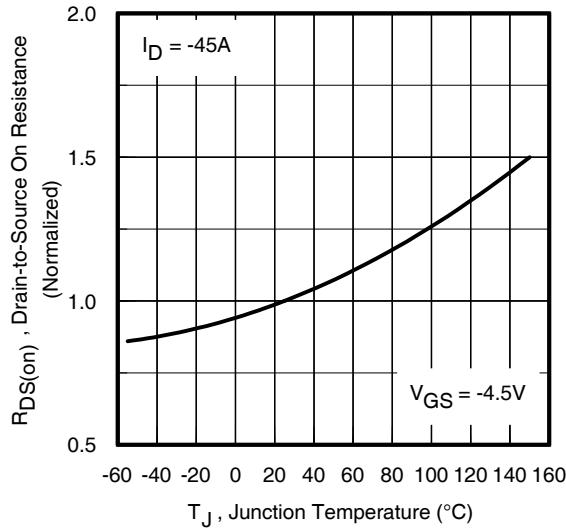


Fig 4. Normalized On-Resistance Vs. Temperature

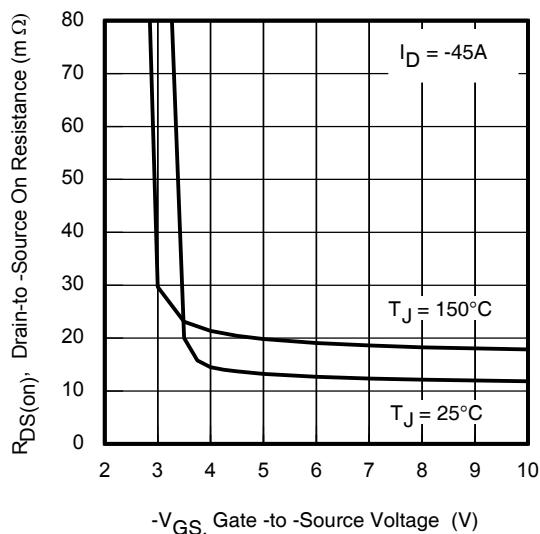


Fig 5. Typical On-Resistance Vs Gate Voltage

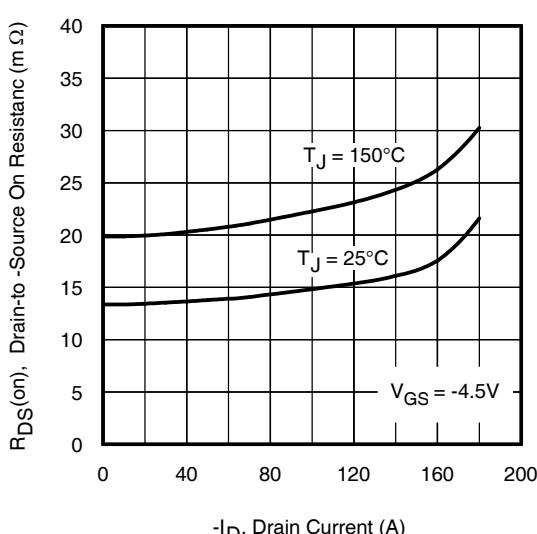


Fig 6. Typical On-Resistance Vs Drain Current

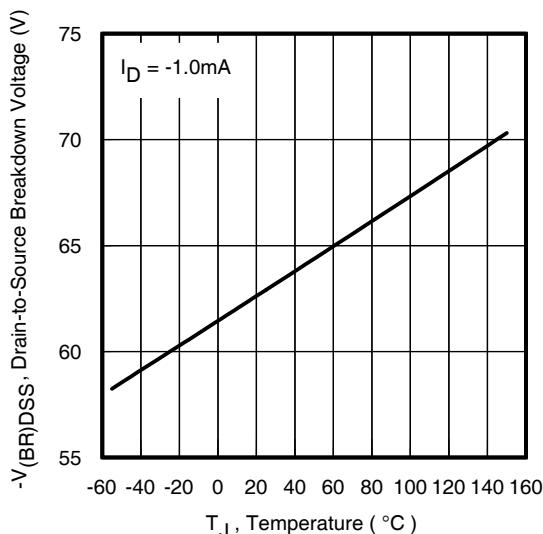


Fig 7. Typical Drain-to-Source Breakdown Voltage Vs Temperature

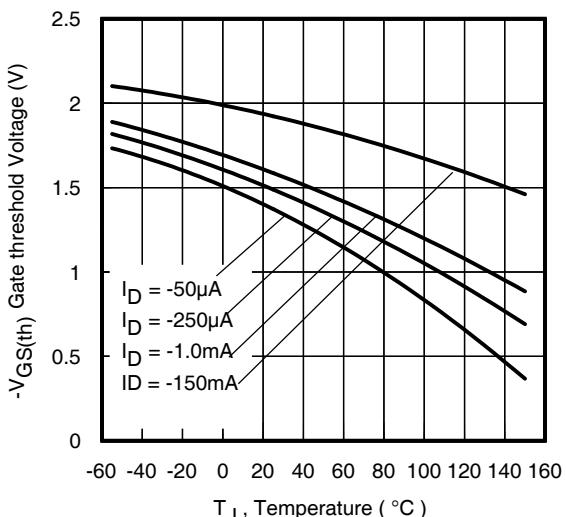


Fig 8. Typical Threshold Voltage Vs Temperature

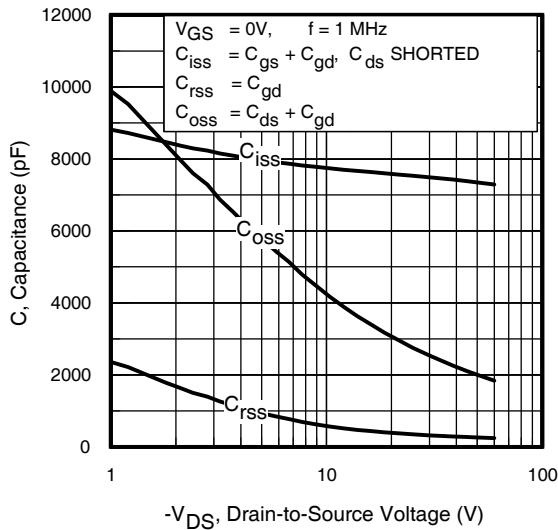


Fig 9. Typical Capacitance Vs. Drain-to-Source Voltage

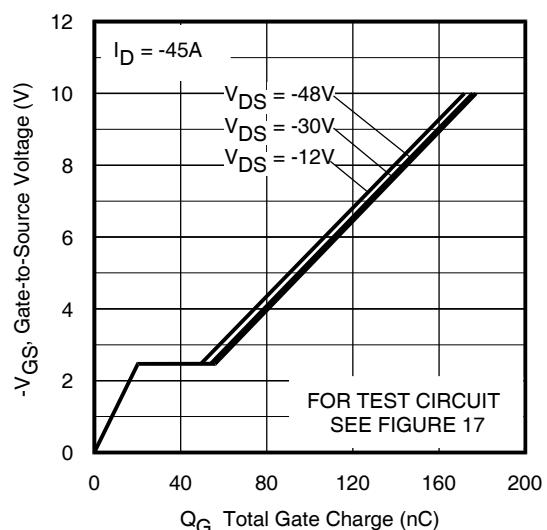


Fig 10. Typical Gate Charge Vs. Gate-to-Source Voltage

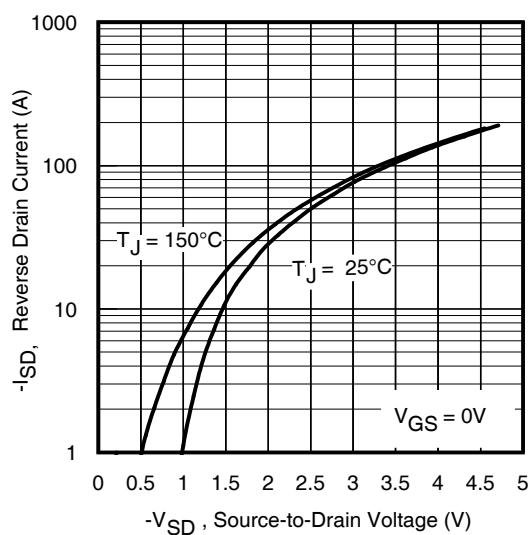


Fig 11. Typical Source-Drain Diode Forward Voltage

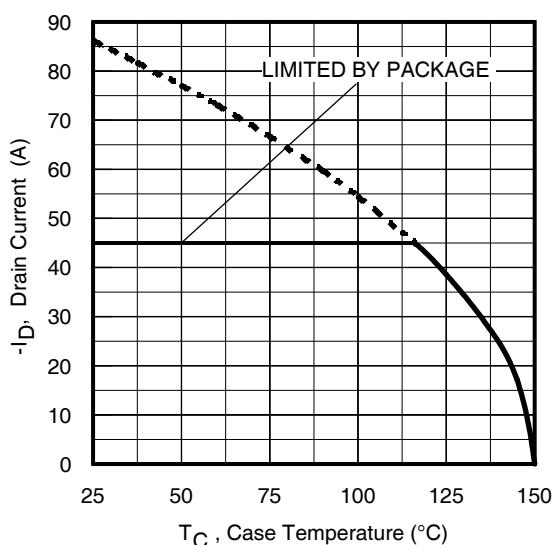


Fig 12. Maximum Drain Current Vs. Case Temperature

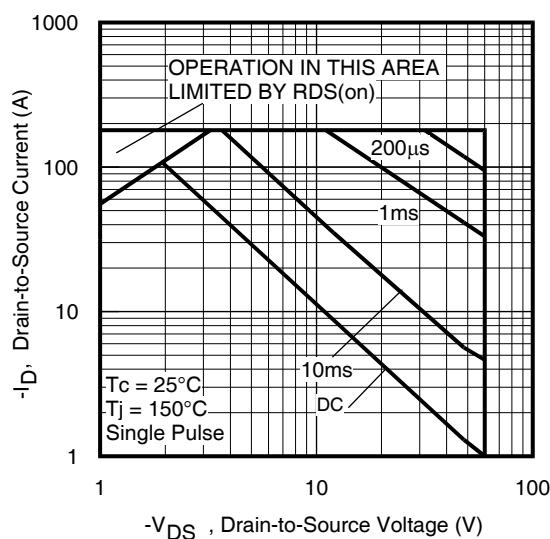


Fig 13. Maximum Safe Operating Area

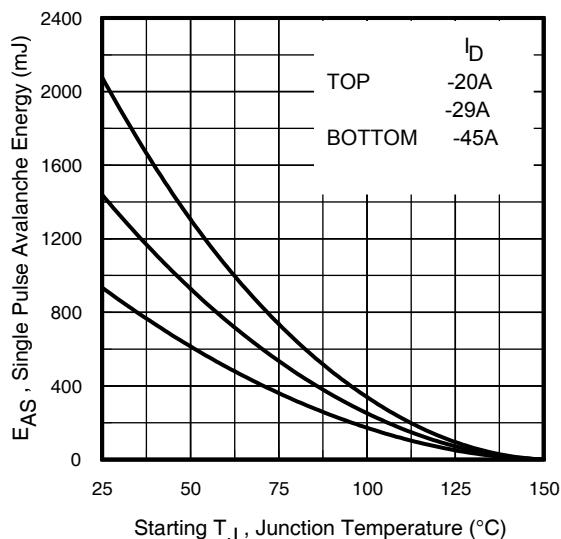


Fig 14. Maximum Avalanche Energy Vs. Drain Current








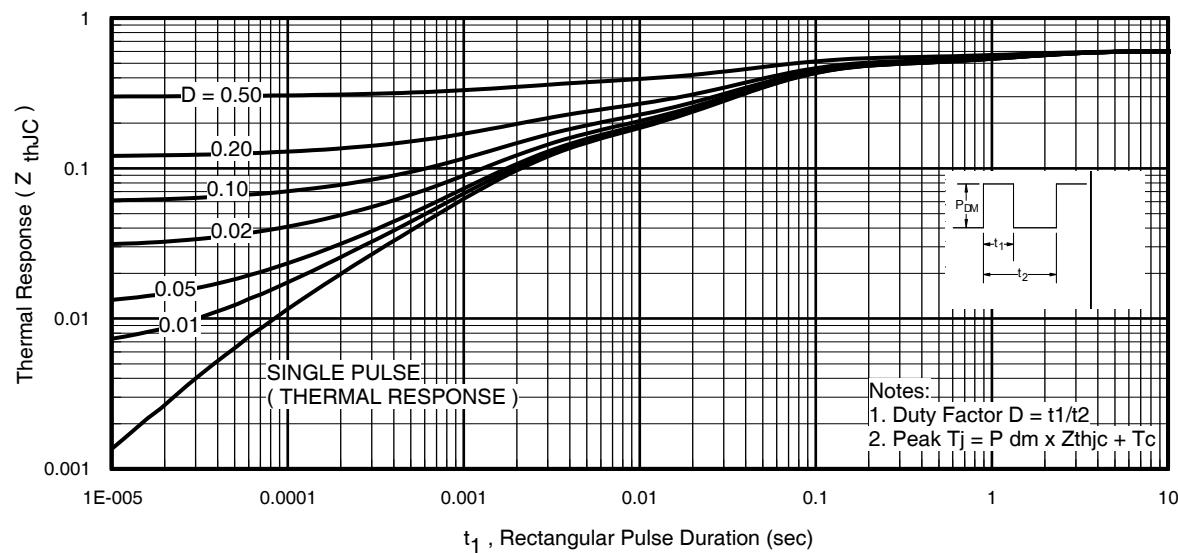


Fig 15. Maximum Effective Transient Thermal Impedance, Junction-to-Case

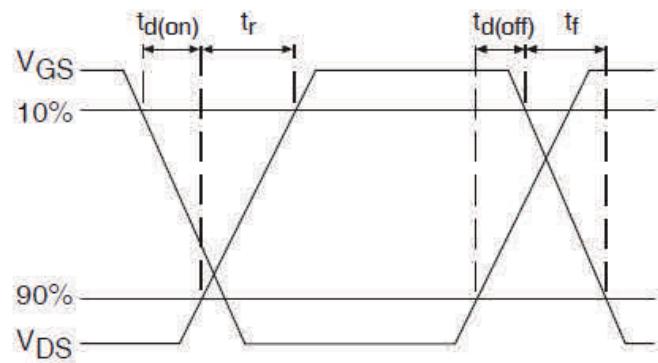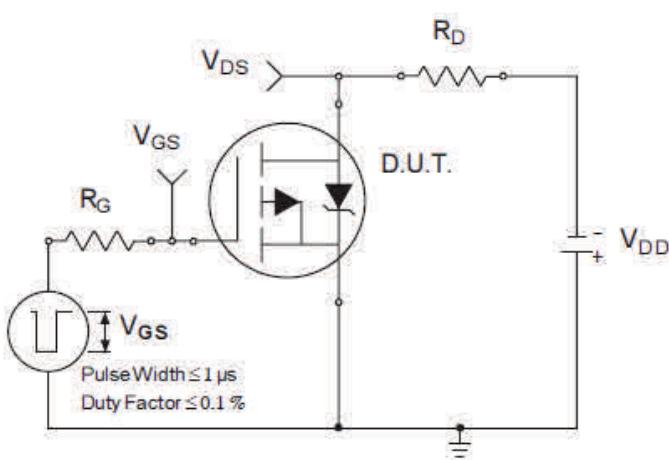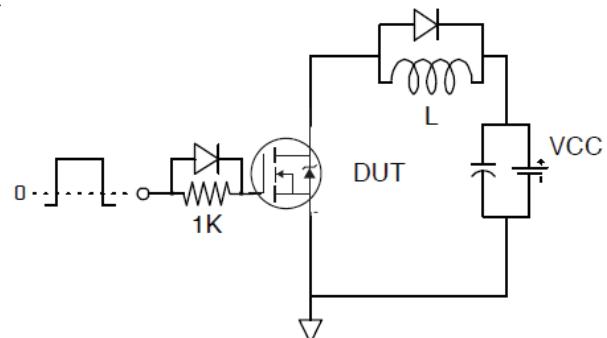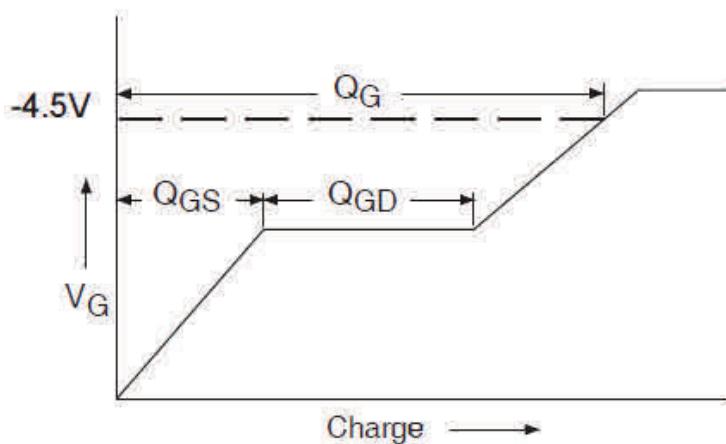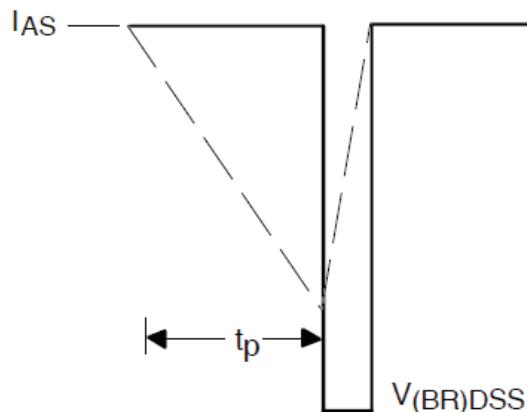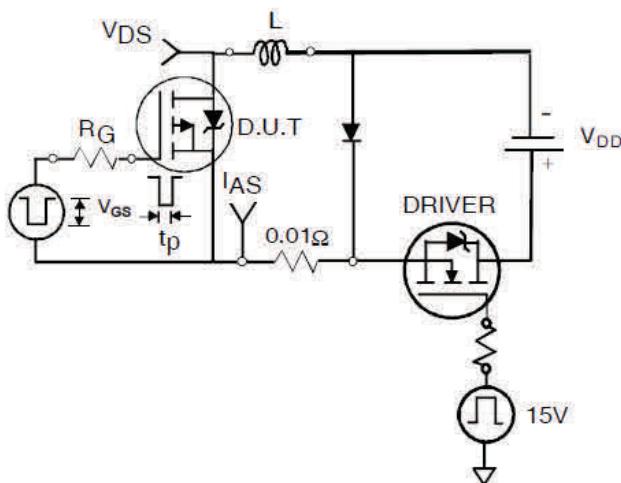

Case Outline and Dimensions - Low-Ohmic TO-254AA

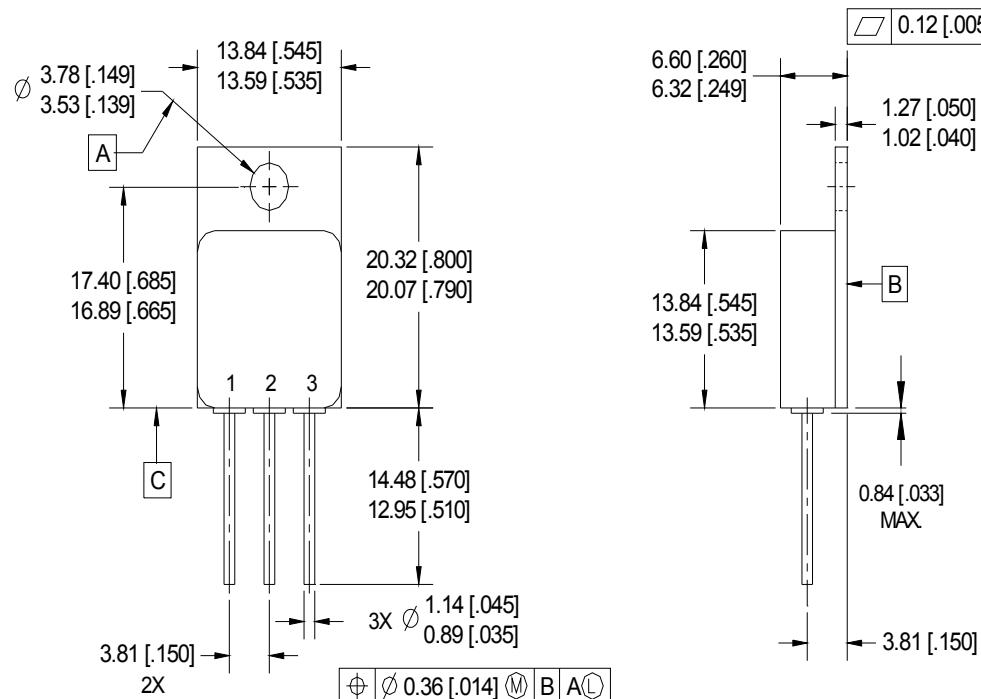

NOTES:

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
3. CONTROLLING DIMENSION: INCH.
4. CONFORMS TO JEDEC OUTLINE TO-254AA.

PIN ASSIGNMENTS

- 1 = DRAIN
- 2 = SOURCE
- 3 = GATE

BERYLLIA WARNING PER MIL-PRF-19500

Package containing beryllia shall not be ground, sandblasted, machined, or have other operations performed on them which will produce beryllia or beryllium dust. Furthermore, beryllium oxide packages shall not be placed in acids that will produce fumes containing beryllium.

IMPORTANT NOTICE

The information given in this document shall be in no event regarded as guarantee of conditions or characteristic. The data contained herein is a characterization of the component based on internal standards and is intended to demonstrate and provide guidance for typical part performance. It will require further evaluation, qualification and analysis to determine suitability in the application environment to confirm compliance to your system requirements.

With respect to any example hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind including without limitation warranties on non-infringement of intellectual property rights and any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's product and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of any customer's technical departments to evaluate the suitability of the product for the intended applications and the completeness of the product information given in this document with respect to applications.

For further information on the product, technology, delivery terms and conditions and prices, please contact your local sales representative or go to (www.infineon.com/hirel).

WARNING

Due to technical requirements products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.