

International **IR** Rectifier

SCHOTTKY RECTIFIER
HIGH EFFICIENCY SERIES

PD-20504D

60LQ045
60A, 45V


Major Ratings and Characteristics

| Characteristics | 60LQ045 | Units |
|---|------------|-------|
| I _{F(AV)} | 60 | A |
| V _{RRM} | 45 | V |
| I _{FSM} @ t _p = 8.3ms half-sine | 400 | A |
| V _F @ 60Apk, T _J = 125°C | 0.6 | V |
| T _J , T _{stg} Operating and storage | -55 to 150 | °C |

Description/Features

The 60LQ045 Schottky rectifier has been expressly designed to meet the rigorous requirements of high reliability environments. It is packaged in the hermetic surface mount SMD-1 ceramic package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on control drawings to TX, TXV and S quality levels.

- Hermetically Sealed
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long term Reliability
- Surface Mount
- Lightweight

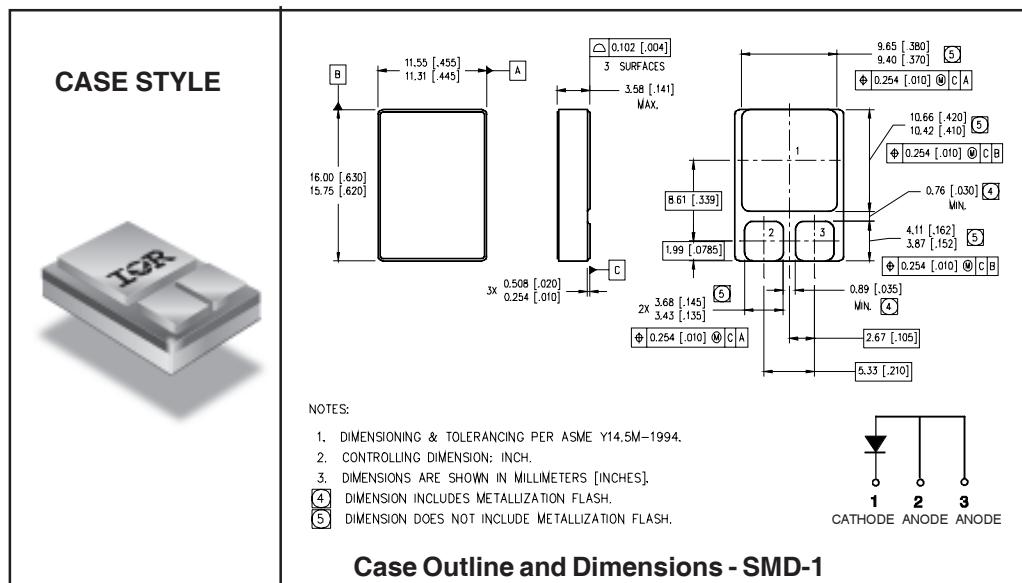

Voltage Ratings

| | | | |
|---|---------|--|--|
| Part number | 60LQ045 | | |
| V_R Max. DC Reverse Voltage (V) | 45 | | |
| V_{RWM} Max. Working Peak Reverse Voltage (V) | | | |

Absolute Maximum Ratings

| Parameters | Limits | Units | Conditions |
|--|--------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current See Fig. 5 | 60 | A | 50% duty cycle @ $T_C = 105^\circ\text{C}$, square waveform |
| I_{FSM} Max. Peak One Cycle Non - Repetitive Surge Current | 400 | A | @ $t_p = 8.3 \text{ ms}$ half-sine |

Electrical Specifications

| Parameters | Limits | Units | Conditions | | |
|---|--------|-------|--|---------------------------|--|
| V_{FM} Max. Forward Voltage Drop See Fig. 1 ① | 0.75 | V | @ 60A | $T_J = -55^\circ\text{C}$ | |
| | 0.89 | V | | | |
| | 0.68 | V | @ 60A | $T_J = 25^\circ\text{C}$ | |
| | 0.82 | V | | | |
| | 0.60 | V | @ 60A | $T_J = 125^\circ\text{C}$ | |
| | 0.74 | V | | | |
| I_{RM} Max. Reverse Leakage Current See Fig. 2 ② | 0.8 | mA | $T_J = 25^\circ\text{C}$ | | |
| | 45 | mA | $T_J = 125^\circ\text{C}$ | | |
| C_T Max. Junction Capacitance | 2900 | pF | $V_R = 5\text{V}_{\text{DC}}$ (1MHz, 25°C) | | |
| L_S Typical Series Inductance | 5.9 | nH | Measured from center of cathode pad to center of anode pad | | |

Thermal-Mechanical Specifications

| Parameters | Limits | Units | Conditions | |
|--|------------|-------|--------------|------------|
| T_J Max.Junction Temperature Range | -55 to 150 | °C | | |
| T_{stg} Max. Storage Temperature Range | -55 to 150 | °C | | |
| R_{thJC} Max. Thermal Resistance, Junction to Case | 1.0 | °C/W | DC operation | See Fig. 4 |
| wt Weight(Typical) | 2.6 | g | | |
| Die Size | 200X200 | mils | | |
| Case Style | SMD-1 | | | |

① Pulse Width < 300μs, Duty Cycle < 2%

② Pins 2 and 3 externally tied together

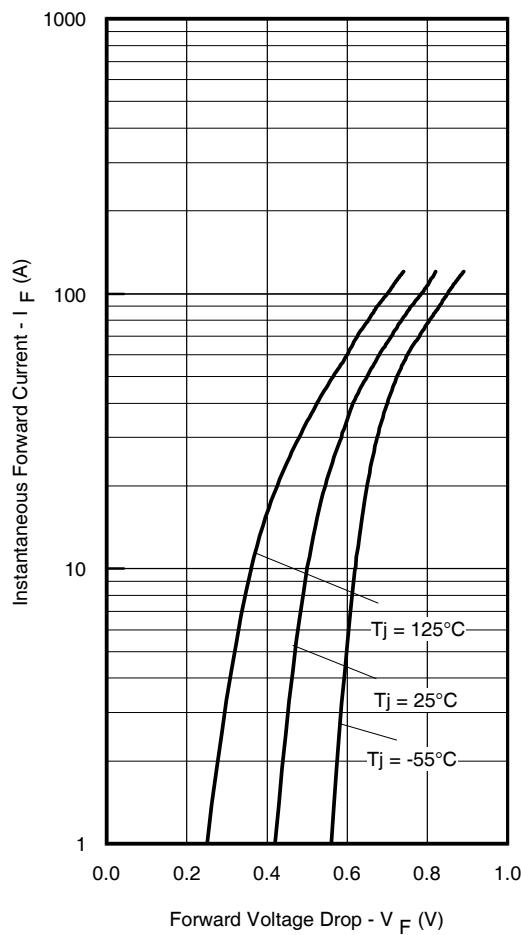


Fig. 1 - Max. Forward Voltage Drop Characteristics

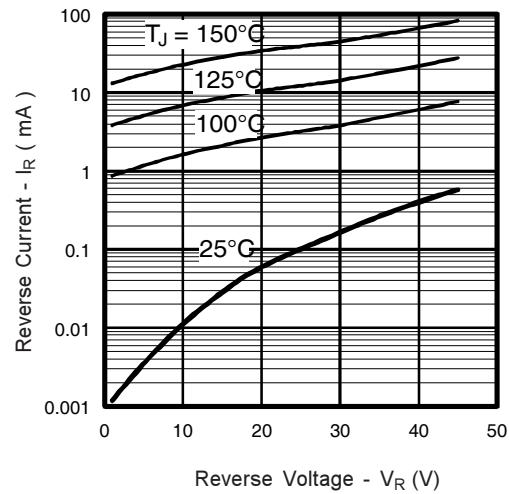


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

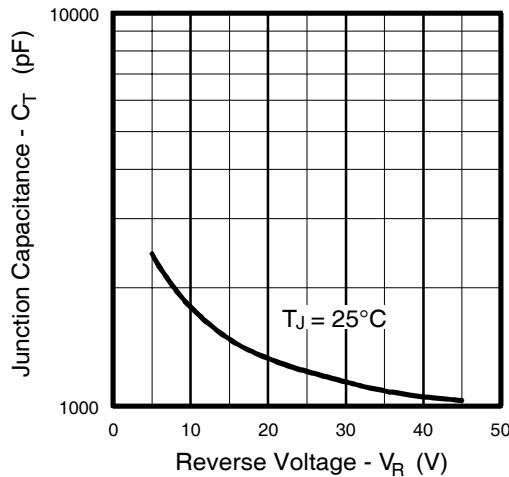


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

60LQ045

International
IR Rectifier

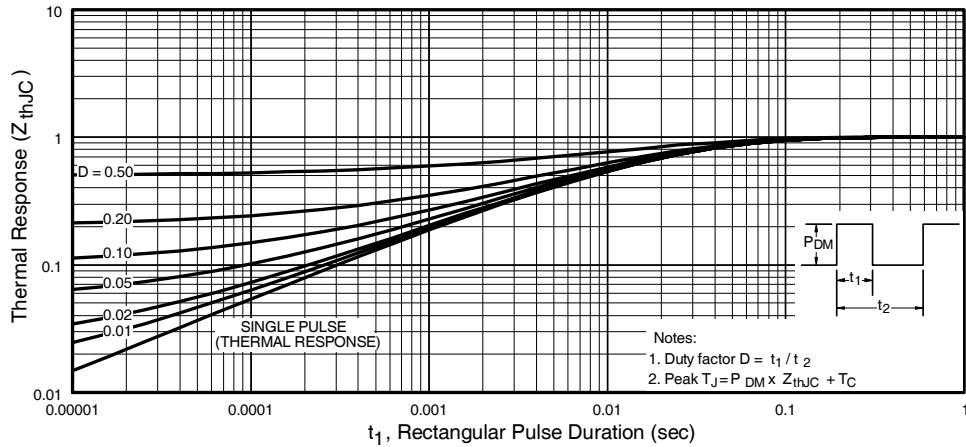


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

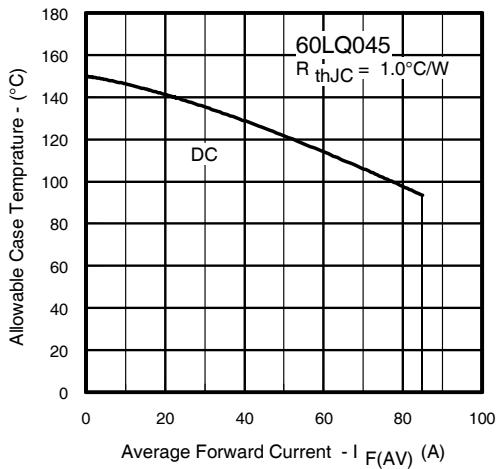


Fig. 5 - Max. Allowable Case Temperature Vs.
Average Forward Current

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

IR LEOMINSTER : 205 Crawford St., Leominster, Massachusetts 01453, USA Tel: (978) 534-5776

TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.

Data and specifications subject to change without notice. 10/2012