



Features

- 2:1 input voltage range
- High efficiency up to 90.0%
- No-load power loss as low as 0.12W
- 1,500Vdc input to output isolation
- Input under-voltage, output over-current, over-voltage and short-circuit protections
- Operating temperature range: -40 to +85 °C
- Industry standard pin-out
- UL 60950-1 2nd edition recognized



Part Numbering System

LM	S	x	xxx	P	15W	1	LD	C
Series Name	No. of Output	Input Range	Output Voltage	Enable Logic	Output Power	Isolation Voltage	Package	Version No.
	S: Single 2: 18-36V 4: 36-75V	Example: 050: 5V		P: Positive	15W: 15W	1: 1500Vdc	LD: 2x1	C: Version No.

Selection Guide

Part No.	Input Voltage (Vdc)	Output		Efficiency(%) at typical input & full load	Max. Load Capacitance (μF)
		Voltage(Vdc)	Current(mA)		
LMS2050P15W1LDC	24 (18-36)	5	3000	89.0	4700
LMS2120P15W1LDC		12	1250	89.0	1000
LMS2150P15W1LDC		15	1000	89.0	820
LMS2240P15W1LDC		24	625	90.0	270
LMS4050P15W1LDC	48 (36-75)	5	3000	88.0	4700
LMS4120P15W1LDC		12	1250	88.0	1000
LMS4150P15W1LDC		15	1000	89.0	820
LMS4240P15W1LDC		24	625	89.0	270

Input Specifications

Parameter	Notes & Conditions		Min	Typical	Max	Unit
Input Current(full load)	24Vdc input series	5V output	-	702	718	mA
		Others	-	702	718	
	48Vdc input series	5V output	-	355	363	
		Others	-	351	363	
Input Current (zero load)	24Vdc input series	5V output	-	30	75	mA
		Others	-	5	10	
	48Vdc input series	5V output	-	20	30	
		Others	-	5	10	
Reflected Ripple Current	Full input range		-	30	-	
Surge Voltage (1sec. max.)	24Vdc input series		-0.7	-	50	Vdc
	48Vdc input series		-0.7	-	100	
Starting Voltage	24Vdc input series		-	-	18	
	48Vdc input series		-	-	36	
Input Under-voltage protection	24Vdc input series		12	15.5	-	
	48Vdc input series		26	30	-	
Starting Time	Nominal input voltage & constant resistive load		-	10	-	ms
Ctrl*	Module turn-on		Ctrl pin floating or connected to TTL high level(3.5-12Vdc)			
	Module turn-off		Ctrl pin connected to Vin(-) or low level(0-1.2Vdc)			
	Current for turn-off		-	4	7	mA
Hot Plugging		Not supported				

*The voltage at Ctrl is referenced to Vin(-).

Output Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Output Voltage Accuracy		-	±1	±3	%Vo
Line Regulation	Full range input voltage, full load	-	±0.2	±0.5	%Vo
Load Regulation	0%-100% of full load, nominal input	-	±0.5	±1	%Vo
Temperature Coefficient	Full load	-	-	0.03	%/°C
Transient Recovery Time	25% load step, nominal input voltage	-	300	500	μs
Transient Response Deviation		-	±3	±5	%Vo
Ripple & Noise	20MHz bandwidth	-	50	100	mVp-p
Ripple Frequency*		-	270	-	kHz
Trim	Full input range	90	-	110	%Vo
Over-voltage Protection		110	-	160	
Over-current Protection		110	-	190	%Io
Short circuit Protection		Hiccup mode, continuous, auto-recovery			

* The ripple frequency decreases as the load decreases at 50% or less of the full load.

Safety and Environmental Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Isolation Voltage	Input-Output, 1 minute, leakage current less than 1mA	1,500	-	-	Vdc
Insulation Resistance	Input-Output, isolation voltage 500Vdc	1,000	-	-	MΩ
Isolation Capacitance	Input-Output, 100KHz/0.1V	-	1,050	-	pF
Operating Temperature		-40	-	+85	°C
Storage Temperature		-55	-	+125	
Storage Humidity	Non-condensing	5	-	95	%RH
Vibration		10-55Hz, 2G, 30 min. along X, Y and Z			
MTBF	MIL-HDBK-217F@25 °C	1	-	-	10 ⁶ hours

Note: Unless otherwise specified, data in this datasheet should be tested under the conditions of nominal input voltage, rated load and Ta=25°C.

Other Specifications

Parameter	Notes
Case Material	Aluminum alloy
Dimensions	50.80 x 25.40 x 11.80 mm
Weight	26g (Typ.)
Cooling Method	Free air convection

EMC Specifications

Parameter		Notes & Conditions	
EMI	CE	CISPR32/EN55032 CLASS A (Without extra components) / CLASS B (See Figure 6-②)	
	RE	CISPR32/EN55032 CLASS A (Without extra components) / CLASS B (See Figure 6-②)	
EMS	ESD	IEC/EN61000-4-2 Contact ±4KV	perf. Criteria B
	RS	IEC/EN61000-4-3 10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4 ±2KV (See Figure 6-①)	perf. Criteria B
	Surge	IEC/EN61000-4-5 line to line ±2KV (See Figure 6-①)	perf. Criteria B
	CS	IEC/EN61000-4-6 3Vrms	perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-29 0%, 70%	perf. Criteria B

Characteristic Curves

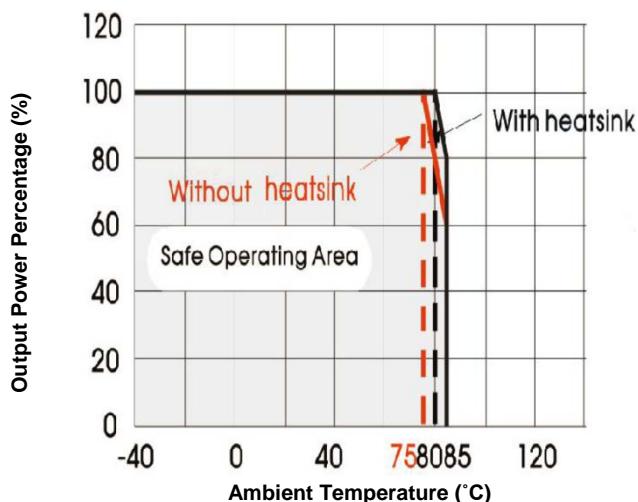


Figure 1. Temperature Derating Curve

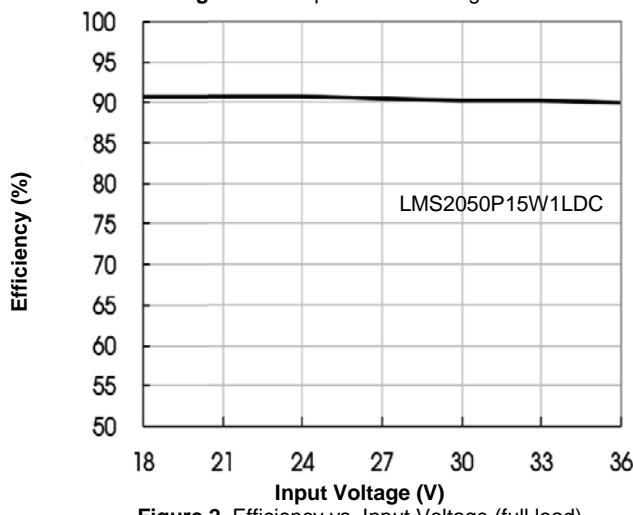


Figure 2. Efficiency vs. Input Voltage (full load)

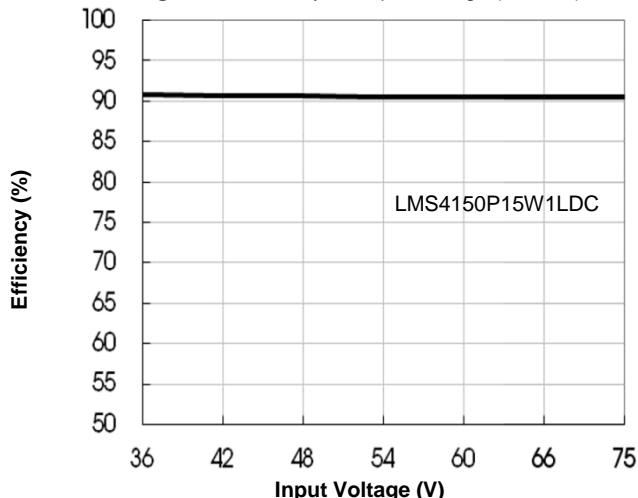


Figure 4. Efficiency vs. Input Voltage (full load)

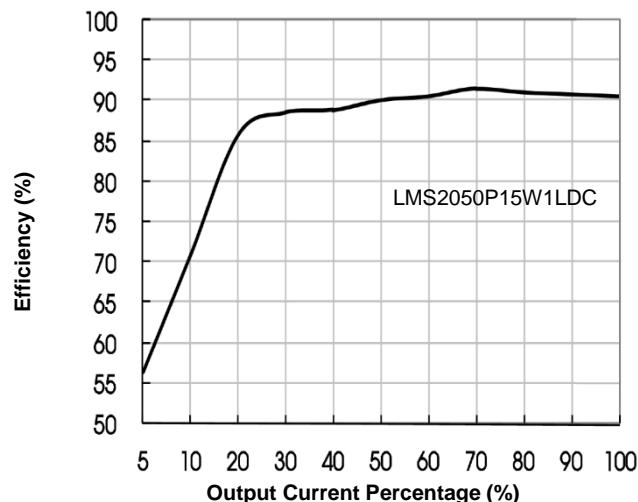


Figure 3. Efficiency vs. Output Load (Vin=24V)


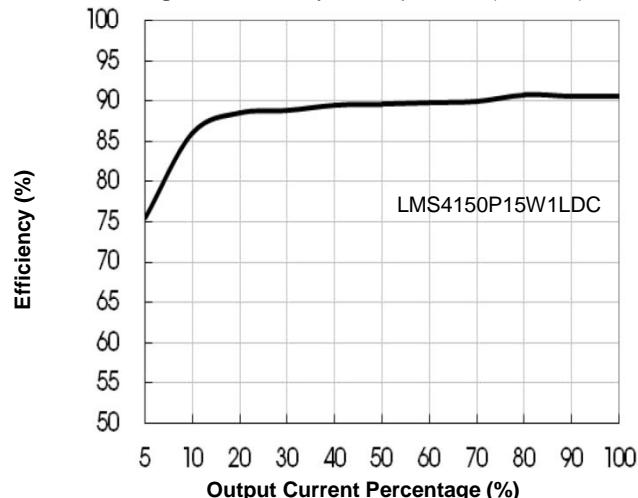


Figure 5. Efficiency vs. Output Load (Vin=48V)

Mechanical Drawing

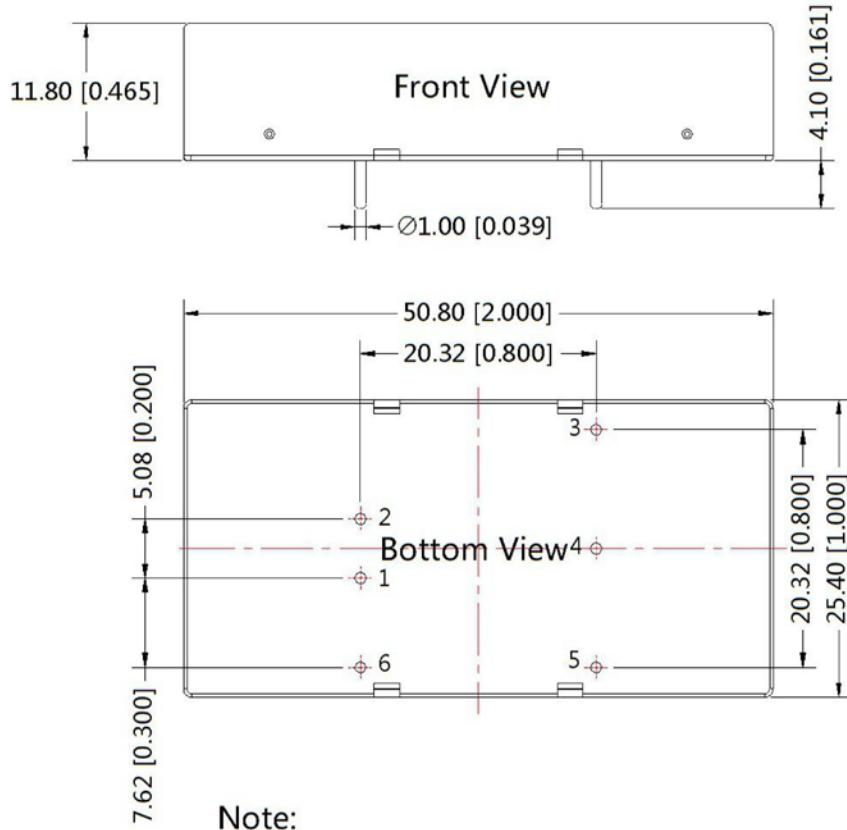

Note:

Pin	Name	Function
1	Vin (-)	Negative input voltage
2	Vin (+)	Positive input voltage
3	Vout (+)	Positive output voltage
4	Trim	Output voltage adjustment
5	Vout (-)	Negative output voltage
6	Ctrl	On/Off control

Notes:

- 1) All dimension in mm(inches)
Tolerances: $\pm 0.50 (\pm 0.020)$
- 2) Pin section tolerances : $\pm 0.10 (\pm 0.004)$

EMC Typical Application Circuit


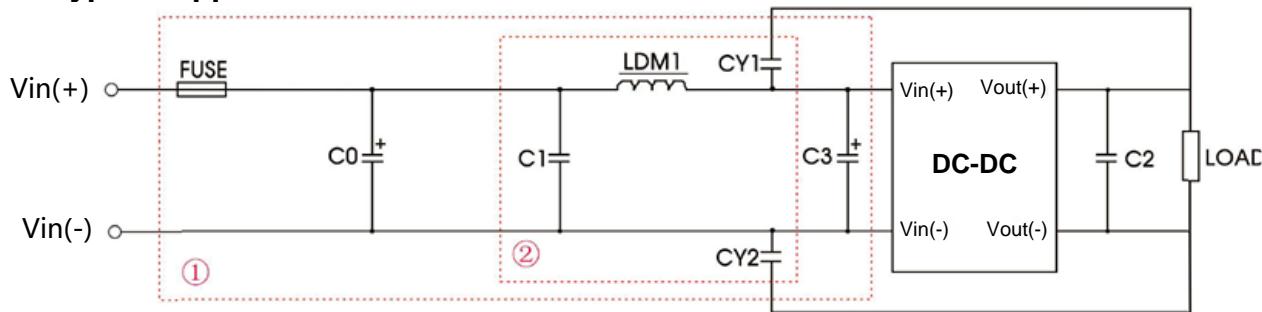


Figure 6. EMC Recommended Circuit

Component	Recommended Value	
	24Vin	48Vin
FUSE	Choose according to the actual input current	
C0, C3	330μF/50V	330μF/100V
C1	1μF/50V	4.7μF/100V
C2	470μF(5Vo) / 220μF(12/15Vo) / 100μF(24Vo)	
LDM1		4.7μH/2.2A
CY1		1nF/2KV

Trim Function

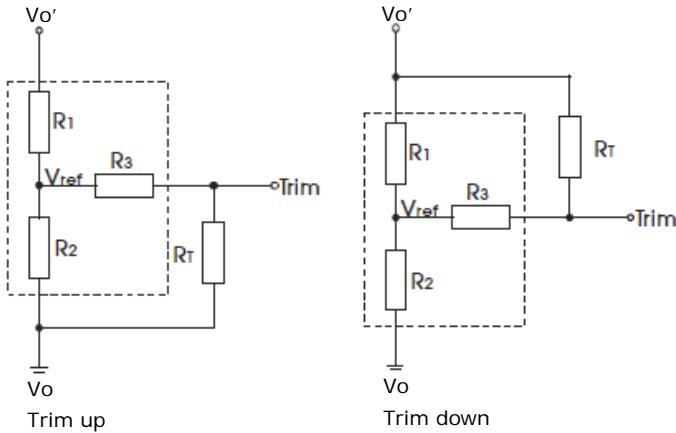

Formula of Trim Resistance:

$$\text{up: } R_T = \frac{\alpha R_2}{R_2 - \alpha} - R_3 \quad \alpha = \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1$$

$$\text{down: } R_T = \frac{\alpha R_1}{R_1 - \alpha} - R_3 \quad \alpha = \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_2$$

Notes:

R_T: Trim Resistor

a: User-defined parameter, no actual meanings

V_{o'}: The trim up/down voltage

Figure 7. Trim Function

V _{out}	R ₁ (kΩ)	R ₂ (kΩ)	R ₃ (kΩ)	V _{ref} (V)
3.3V	4.801	2.87	12.4	1.24
5V	2.883	2.87	10	2.5
12V	11	2.87	15	2.5
15V	14.494	2.87	15	2.5
24V	24.872	2.87	17.8	2.5