REF: MIL-PRF-19500/700

60V, N CHANNEL

**7** TECHNOLOGY



# RADIATION HARDENED POWER MOSFET SURFACE MOUNT (LCC-18)

**Product Summary** 

Part Number	Radiation Level	RDS(on)	I <sub>D</sub>	QPL Part Number
IRHE57034	100 kRads(Si)	$\Omega$ 80.0	11.7A	JANSR2N7495U5
IRHE53034	300 kRads(Si)	$\Omega$ 80.0	11.7A	JANSF2N7495U5
IRHE55034	500 kRads(Si)	$\Omega$ 80.0	11.7A	JANSG2N7495U5
IRHE58034	1000 kRads(Si)	0.1Ω	11.7A	JANSN2N7495U5



## Description

IR HiRel R5 technology provides high performance power MOSFETs for space applications. These devices have been characterized for Single Event Effects (SEE) with useful performance up to an LET of 80 (MeV/(mg/cm2)). The combination of low RDS(on) and low gate charge reduces the power losses in switching applications such as DC to DC converters and motor control. These devices retail all of the well established advantages of MOSFETs such as voltage control, fast switching and temperature stability of electrical parameters.

#### **Features**

- Single Event Effect (SEE) Hardened
- Ultra Low RDS(on)
- Low Total Gate Charge
- Simple Drive Requirements
- Hermetically Sealed
- Ceramic Package
- Surface Mount
- Light Weight
- ESD Rating: Class 1C per MIL-STD-750, Method 1020

## **Absolute Maximum Ratings**

### **Pre-Irradiation**

Symbol	Parameter	Value	Units	
$I_{D1}$ @ $V_{GS}$ = 12V, $T_{C}$ = 25°C	Continuous Drain Current	11.7		
I <sub>D2</sub> @ V <sub>GS</sub> = 12V, T <sub>C</sub> = 100°C	Continuous Drain Current	7.4	Α	
I <sub>DM</sub> @T <sub>C</sub> = 25°C	Pulsed Drain Current ①	46.8		
P <sub>D</sub> @T <sub>C</sub> = 25°C	Maximum Power Dissipation	25	W	
	Linear Derating Factor	0.2	W/°C	
$V_{GS}$	Gate-to-Source Voltage	± 20	V	
E <sub>AS</sub>	Single Pulse Avalanche Energy ②	87	mJ	
I <sub>AR</sub>	Avalanche Current ①	11.7	Α	
E <sub>AR</sub>	Repetitive Avalanche Energy ①	2.5	mJ	
dv/dt	Peak Diode Recovery dv/dt ③	3.4	V/ns	
T <sub>J</sub>	Operating Junction and	-55 to + 150		
T <sub>STG</sub>	Storage Temperature Range	-55 to + 150	°C	
	Package Mounting Surface Temperature	300 (for 5s)		
	Weight	0.42 (Typical)	g	

For Footnotes, refer to the page 2



## Electrical Characteristics @ Tj = 25°C (Unless Otherwise Specified)

Symbol	Parameter	Min.	Тур.	Max.	Units	Test Conditions
BV <sub>DSS</sub>	Drain-to-Source Breakdown Voltage	60			V	$V_{GS} = 0V, I_{D} = 1.0mA$
$\Delta BV_{DSS}/\Delta T_{J}$	Breakdown Voltage Temp. Coefficient		0.058		V/°C	Reference to 25°C, I <sub>D</sub> = 1.0mA
R <sub>DS(on)</sub>	Static Drain-to-Source On-Resistance			0.08	Ω	V <sub>GS</sub> = 12V, I <sub>D2</sub> = 7.4A ④
V <sub>GS(th)</sub>	Gate Threshold Voltage	2.0		4.0	V	$V_{DS} = V_{GS}$ , $I_D = 1.0 \text{mA}$
Gfs	Forward Transconductance	7.0			S	V <sub>DS</sub> = 15V, I <sub>D2</sub> = 7.4A ④
I <sub>DSS</sub>	Zero Gate Voltage Drain Current			10		$V_{DS} = 48V$ , $V_{GS} = 0V$
	Zelo Gate Voltage Dialii Cullelit			25	μA	$V_{DS} = 48V, V_{GS} = 0V, T_{J} = 125^{\circ}C$
I <sub>GSS</sub>	Gate-to-Source Leakage Forward			100	nA	$V_{GS} = 20V$
	Gate-to-Source Leakage Reverse			-100	ш	V <sub>GS</sub> = -20V
$Q_G$	Total Gate Charge			45		I <sub>D1</sub> = 11.7A
$Q_{GS}$	Gate-to-Source Charge			15	nC	V <sub>DS</sub> = 30V
$Q_{GD}$	Gate-to-Drain ('Miller') Charge			20		V <sub>GS</sub> = 12V
t <sub>d(on)</sub>	Turn-On Delay Time			25		$V_{DD} = 30V$
tr	Rise Time			100		I <sub>D1</sub> = 11.7A
t <sub>d(off)</sub>	Turn-Off Delay Time			35	ns	$R_G = 7.5\Omega$
t <sub>f</sub>	Fall Time			30		V <sub>GS</sub> = 12V
Ls +L <sub>D</sub>	Total Inductance		6.1		nH	Measured from the center of drain pad to center of source pad
C <sub>iss</sub>	Input Capacitance	<u> </u>	1250			V <sub>GS</sub> = 0V
Coss	Output Capacitance		520		pF	V <sub>DS</sub> = 25V
C <sub>rss</sub>	Reverse Transfer Capacitance		16			f = 1.0MHz

## **Source-Drain Diode Ratings and Characteristics**

Symbol	Parameter	Min.	Тур.	Max.	Units	Test Conditions
Is	Continuous Source Current (Body Diode)			11.7	_	
I <sub>SM</sub>	Pulsed Source Current (Body Diode) ①			46.8	A	
$V_{SD}$	Diode Forward Voltage		_	1.8	V	$T_J = 25^{\circ}C, I_S = 11.7A, V_{GS} = 0V$
t <sub>rr</sub>	Reverse Recovery Time			125	ns	$T_J = 25^{\circ}C, I_F = 11.7A, V_{DD} \le 25V$
Q <sub>rr</sub>	Reverse Recovery Charge			420	nC	di/dt = 100A/µs ④
t <sub>on</sub>	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by $L_S+L_D$ )				

## **Thermal Resistance**

Symbol	Parameter	Min.	Тур.	Max.	Units
$R_{\theta JC}$	Junction-to-Case			5.0	
$R_{\theta J\text{-PCB}}$	Junction-to-PC Board (soldered to a copper-dad PC board)		19		°C/W
$R_{\theta JA}$	Junction-to-Ambient		75		

#### Footnotes:

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- $^{\circ}$  V<sub>DD</sub> = 25V, starting T<sub>J</sub> = 25°C, L = 1.27mH, Peak I<sub>L</sub> = 11.7A, V<sub>GS</sub> = 12V
- $\exists \quad I_{SD} \leq 11.7A, \ di/dt \leq 220A/\mu s, \ V_{DD} \leq 60V, \ T_J \leq 150^{\circ}C$
- 4 Pulse width  $\leq 300 \ \mu s$ ; Duty Cycle  $\leq 2\%$
- $\odot$  Total Dose Irradiation with  $V_{GS}$  Bias. 12 volt  $V_{GS}$  applied and  $V_{DS}$  = 0 during irradiation per MIL-STD-750, Method 1019, condition A.
- $\odot$  Total Dose Irradiation with V<sub>DS</sub> Bias. 48 volt V<sub>DS</sub> applied and V<sub>GS</sub> = 0 during irradiation per MIL-STD-750, Method 1019, condition A.



#### **Radiation Characteristics**

IR HiRel Radiation Hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at IR Hirel is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 5 and 6) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

Table1. Electrical Characteristics @ Tj = 25°C, Post Total Dose Irradiation \$6

Symbol	Parameter	Up to 500 kRads (Si) <sup>1</sup>		1000 kRads (Si) <sup>2</sup>		Units	Test Conditions	
		Min.	Max.	Min.	in. Max.			
$BV_{DSS}$	Drain-to-Source Breakdown Voltage	60		60		V	$V_{GS} = 0V, I_D = 1.0mA$	
$V_{GS(th)}$	Gate Threshold Voltage	2.0	4.0	1.5	4.0	V	$V_{DS} = V_{GS}$ , $I_D = 1.0 \text{mA}$	
$I_{GSS}$	Gate-to-Source Leakage Forward		100		100	nA	V <sub>GS</sub> = 20V	
$I_{GSS}$	Gate-to-Source Leakage Reverse		-100		-100	nA	V <sub>GS</sub> = -20V	
I <sub>DSS</sub>	Zero Gate Voltage Drain Current		10		25	μA	$V_{DS} = 48V, V_{GS} = 0V$	
R <sub>DS(on)</sub>	Static Drain-to-Source ④ On-State Resistance (TO-3)		0.034		0.043	Ω	V <sub>GS</sub> = 12V, I <sub>D2</sub> = 7.4A	
R <sub>DS(on)</sub>	Static Drain-to-Source ④ On-State Resistance (LCC-18)		0.08		0.1	Ω	V <sub>GS</sub> = 12V, I <sub>D2</sub> = 7.4A	
V <sub>SD</sub>	Diode Forward Voltage 4		1.8		1.8	V	V <sub>GS</sub> = 0V, I <sub>S</sub> = 11.7A	

<sup>1.</sup> Part numbers IRHE57064 (JANSR2N7495U5), IRHE53064 (JANSF2N7495U5) and IRHE55064 (JANSG2N7495U5)

IR HiRel radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. a and Table 2.

Table 2. Typical Single Event Effect Safe Operating Area

LET (MeV/(mg/cm²))	Energy Range (MeV) (µm) @ VGS = 0V	@ VGS = -5V	@ VGS = -10V	@ VGS = -15V	@ VGS = -20V		
38 ± 5%	300 ± 7.5%	38 ± 7.5%	60	60	60	60	30
61 ± 5%	330 ±7. 5%	31 ± 10%	46	46	35	25	15
84 ± 5%	350 ± 10%	28 ± 7.5%	35	30	25	20	14

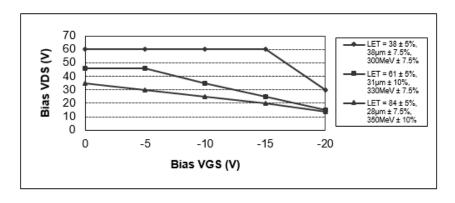


Fig a. Typical Single Event Effect, Safe Operating Area

For Footnotes, refer to the page 2

<sup>2.</sup> Part number IRHE58064 (JANSH2N7495U5)




Fig 1. Typical Output Characteristics





Fig 3. Typical Transfer Characteristics



**Fig 5.** Typical Capacitance Vs. Drain-to-Source Voltage






Fig 2. Typical Output Characteristics



**Fig 4.** Normalized On-Resistance Vs. Temperature



**Fig 6.** Typical Gate Charge Vs. Gate-to-Source Voltage







Fig 7. Typical Source-Drain Diode



**Fig 9.** Maximum Drain Current Vs. Case Temperature





Fig 8. Maximum Safe Operating Area



**Fig 10.** Maximum Avalanche Energy Vs. Drain Current

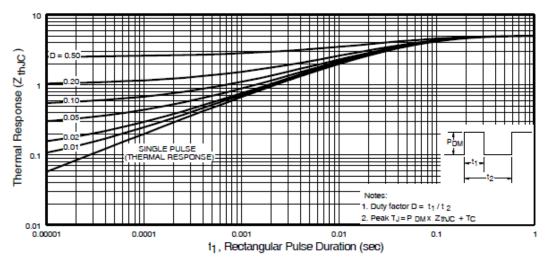


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case




Fig 12a. Unclamped Inductive Test Circuit




Fig 13a. Gate Charge Waveform

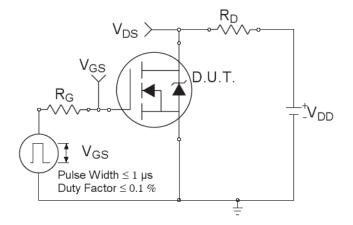


Fig 14a. Switching Time Test Circuit




Fig 12b. Unclamped Inductive Waveforms




Fig 13b. Gate Charge Test Circuit





Fig 14b. Switching Time Waveforms



Note: For the most updated package outline, please see the website: LCC-18

## Case Outline and Dimensions — LCC-18

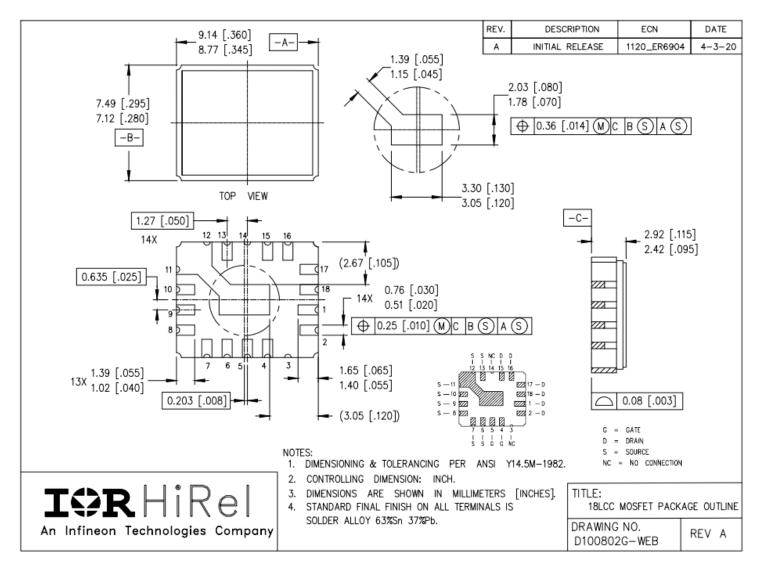



www.infineon.com/irhirel

Infineon Technologies Service Center: USA Tel: +1 (866) 951-9519 and International Tel: +49 89 234 65555

Leominster, Massachusetts 01453, USA Tel: +1 (978) 534-5776

San Jose, California 95134, USA Tel: +1 (408) 434-5000

Data and specifications subject to change without notice.



#### **IMPORTANT NOTICE**

The information given in this document shall be in no event regarded as guarantee of conditions or characteristic. The data contained herein is a characterization of the component based on internal standards and is intended to demonstrate and provide guidance for typical part performance. It will require further evaluation, qualification and analysis to determine suitability in the application environment to confirm compliance to your system requirements.

With respect to any example hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind including without limitation warranties on non- infringement of intellectual property rights and any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's product and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of any customer's technical departments to evaluate the suitability of the product for the intended applications and the completeness of the product information given in this document with respect to applications.

For further information on the product, technology, delivery terms and conditions and prices, please contact your local sales representative or go to (<a href="https://www.infineon.com/irhirel">www.infineon.com/irhirel</a>).

#### WARNING

Due to technical requirements products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.