



An Infineon Technologies Company

**35CGQ100**  
**JANS1N7062CCT1**  
**JANTX1N7062CCT1**  
**JANTXV1N7062CCT1**

**SCHOTTKY RECTIFIER**  
**HIGH EFFICIENCY SERIES**

**35 Amp. 100V**  
 Ref: MIL-PRF- 19500/762

**Major Ratings and Characteristics**



| Characteristics                                    | 1N7062CCT1 | Units            |
|--|------------|------------------|
| $I_{F(AV)}$  | 35         | A                |
| $V_{RRM}$ (Per Leg)                                | 100        | V                |
| $I_{FSM}$ @ tp = 8.3ms half-sine (Per Leg)         | 150        | A                |
| $V_F$ @ 35Apk, $T_J = 125^\circ\text{C}$ (Per Leg) | 0.99       | V                |
| $T_J, T_{stg}$ Operating and storage               | -65 to 150 | $^\circ\text{C}$ |

**Description/Features**

The 1N7062CCT1 center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of IR HiRel environments. It is packaged in the hermetic isolated TO-254AA package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to TX, TXV and S quality levels.

- Hermetically Sealed
- Center Tap
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long term Reliability
- Light Weight
- ESD Rating : Class NS per MIL-STD-750,

**CASE STYLE**

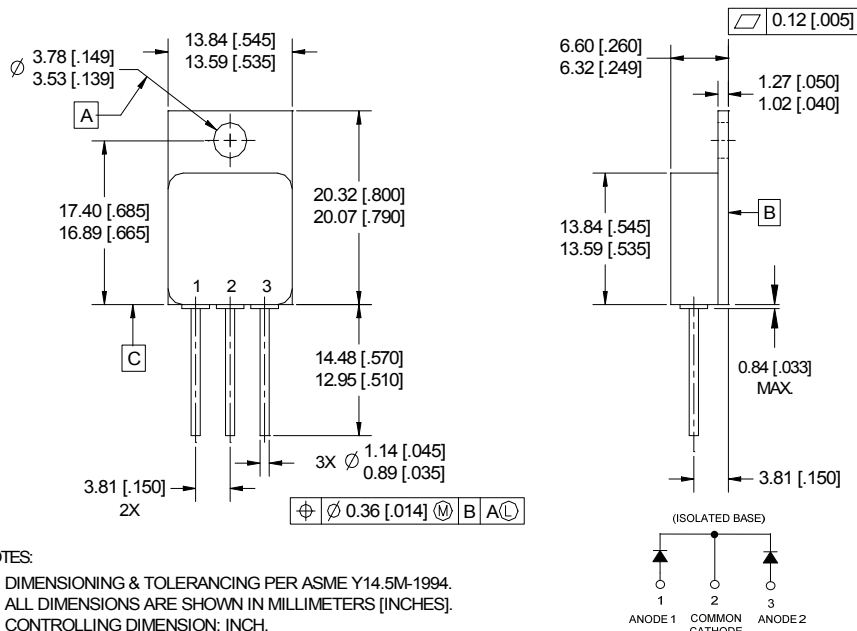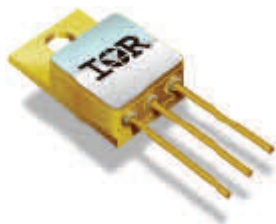

- NOTES:
1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
  2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
  3. CONTROLLING DIMENSION: INCH.
  4. CONFORMS TO JEDEC OUTLINE TO-254AA.

**Case Outline and Dimensions - TO-254AA**

## Voltage Ratings

|   |            |
|---|------------|
| Part Number   | 1N7062CCT1 |
| $V_R$ Max. DC Reverse Voltage (V) (Per Leg)               | 100        |
| $V_{RRM}$ Max. Working Peak Reverse Voltage (V) (Per Leg) |            |

## Absolute Maximum Ratings

| Parameter  | Limits | Units | Conditions   |
|--|--------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current See Fig. 5                    | 35     | A     | 50% duty cycle @ $T_C = 112.5^\circ\text{C}$ , square waveform |
| $I_{FSM}$ Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg) | 150    | A     | @ $t_p = 8.3$ ms half-sine                                     |


## Electrical Specifications

| Parameter  | Limits  | Units | Conditions   |                           |                           |
|--|---|-------|--|---------------------------|---------------------------|
| $V_{FM}$ Max. Forward Voltage Drop (Per Leg) See Fig. 1 ①    | 0.90  | V     | @ $I_F = 15\text{A}$   | $T_J = -55^\circ\text{C}$ |                           |
|  | 1.05  | V     | @ $I_F = 30\text{A}$   |                           |                           |
|  | 1.08  | V     | @ $I_F = 35\text{A}$   |                           |                           |
|  | $V_{FM}$ Max. Forward Voltage Drop (Per Leg) See Fig. 1 ① | 0.82  | V  | @ $I_F = 15\text{A}$      | $T_J = 25^\circ\text{C}$  |
|  |   | 1.01  | V  | @ $I_F = 30\text{A}$      |                           |
|  |   | 1.11  | V  | @ $I_F = 35\text{A}$      |                           |
|  | $V_{FM}$ Max. Forward Voltage Drop (Per Leg) See Fig. 1 ① | 0.71  | V  | @ $I_F = 15\text{A}$      | $T_J = 125^\circ\text{C}$ |
|  |   | 0.92  | V  | @ $I_F = 30\text{A}$      |                           |
|  |   | 0.99  | V  | @ $I_F = 35\text{A}$      |                           |
| $I_{RM}$ Max. Reverse Leakage Current (Per Leg) See Fig. 2 ① | 0.07  | mA    | $T_J = 25^\circ\text{C}$   | $V_R = \text{rated } V_R$ |                           |
|  | 40  | mA    | $T_J = 125^\circ\text{C}$  |                           |                           |
| $C_T$ Max. Junction Capacitance (Per Leg)                    | 1000  | pF    | $V_R = 5V_{DC}$ (1MHz, $25^\circ\text{C}$ )                          |                           |                           |
| $L_S$ Typical Series Inductance (Per Leg)                    | 7.8   | nH    | Measured from anode lead to cathode lead 6mm (0.25 in.) from package |                           |                           |


## Thermal-Mechanical Specifications

| Parameter  | Limits     | Units                     | Conditions              |
|--|------------|---------------------------|-------------------------|
| $T_J$ Max. Junction Temperature Range                              | -65 to 150 | $^\circ\text{C}$          |                         |
| $T_{stg}$ Max. Storage Temperature Range                           | -65 to 150 | $^\circ\text{C}$          |                         |
| $R_{thJC}$ Max. Thermal Resistance, Junction to Case (Per Leg)     | 1.25       | $^\circ\text{C}/\text{W}$ | DC operation See Fig. 4 |
| $R_{thJC}$ Max. Thermal Resistance, Junction to Case (Per Package) | 0.63       | $^\circ\text{C}/\text{W}$ | DC operation            |
| $W_t$ Weight (Typical)   | 9.3        | g                         |                         |
| Die Size (Typical)   | 158 x 158  | mils                      |                         |
| Case Style   | TO-254AA   |                           |                         |


① Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

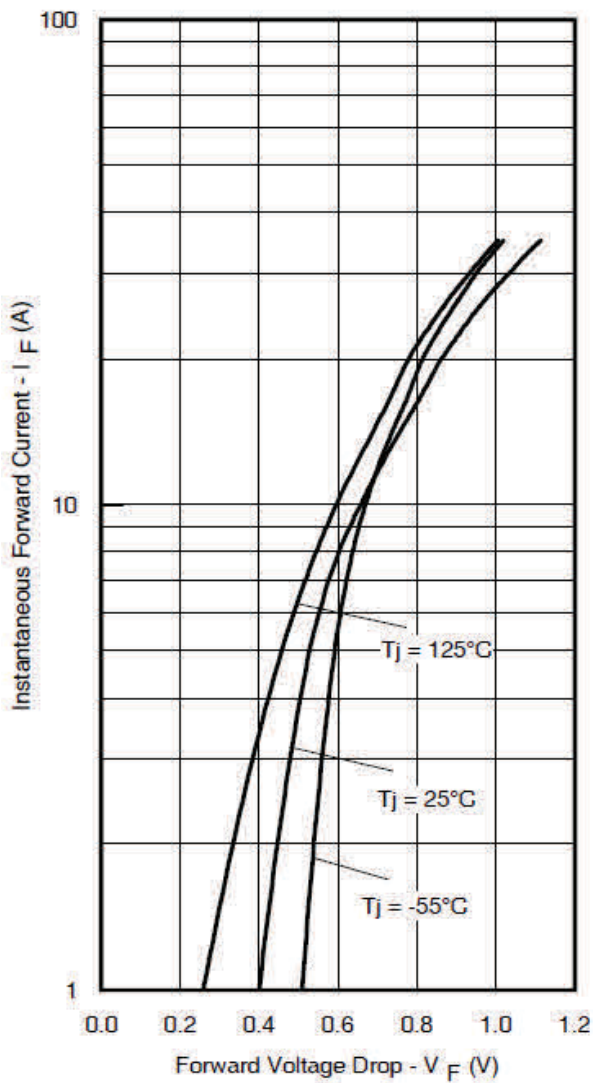


**Fig 1.** Max. Forward Voltage Drop Characteristics (Per Leg)

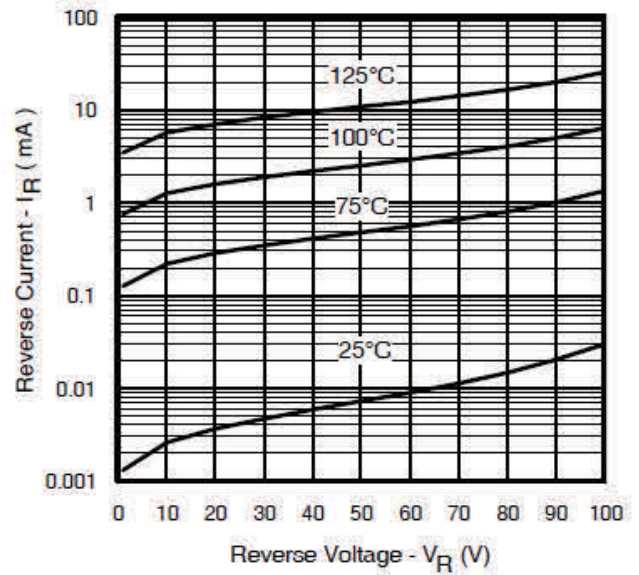


**Fig 2.** Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

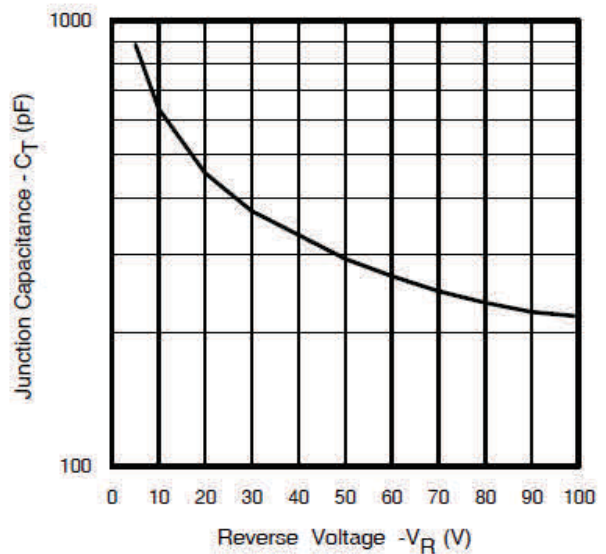

**Fig 3.** Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

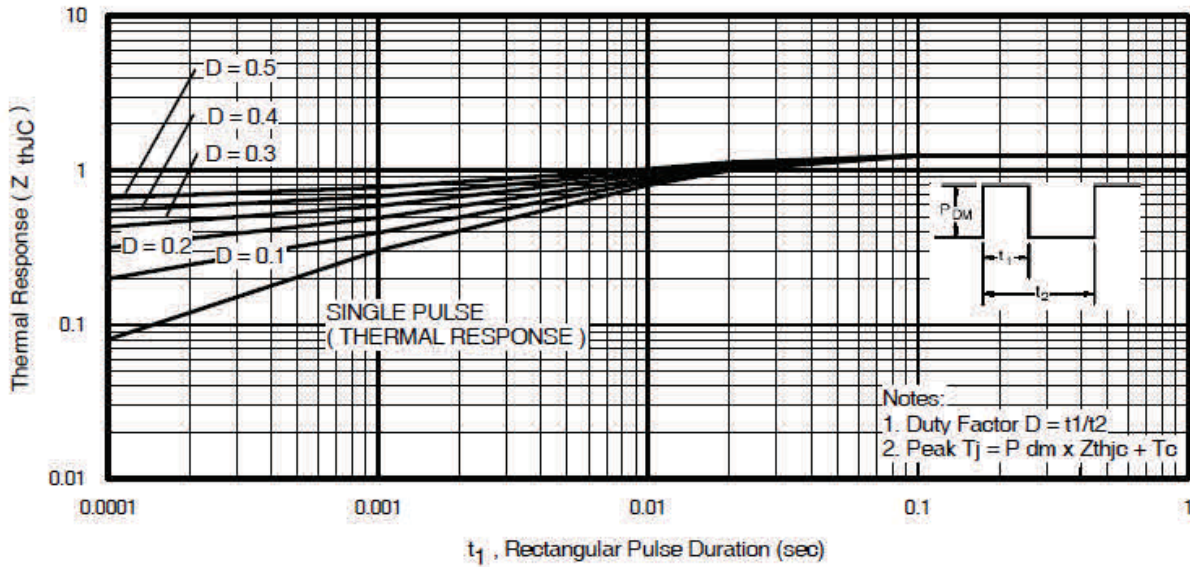

**Fig 4.** Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

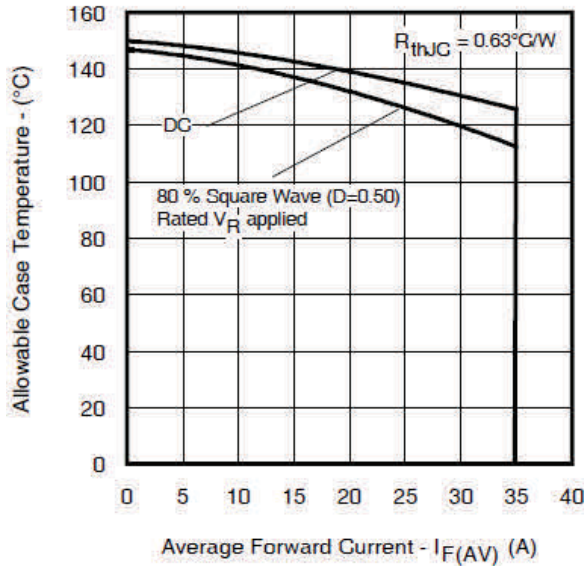

**Fig 5.** Max. Allowable Case Temperature Vs. Average Forward Current (Per Package)

### **IMPORTANT NOTICE**

The information given in this document shall be in no event regarded as guarantee of conditions or characteristic. The data contained herein is a characterization of the component based on internal standards and is intended to demonstrate and provide guidance for typical part performance. It will require further evaluation, qualification and analysis to determine suitability in the application environment to confirm compliance to your system requirements.

With respect to any example hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind including without limitation warranties on non- infringement of intellectual property rights and any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's product and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of any customer's technical departments to evaluate the suitability of the product for the intended applications and the completeness of the product information given in this document with respect to applications.

For further information on the product, technology, delivery terms and conditions and prices, please contact your local sales representative or go to ([www.infineon.com/hirel](http://www.infineon.com/hirel)).

### **WARNING**

Due to technical requirements products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.